




First in service. Impressions that last.<sup>SM</sup>

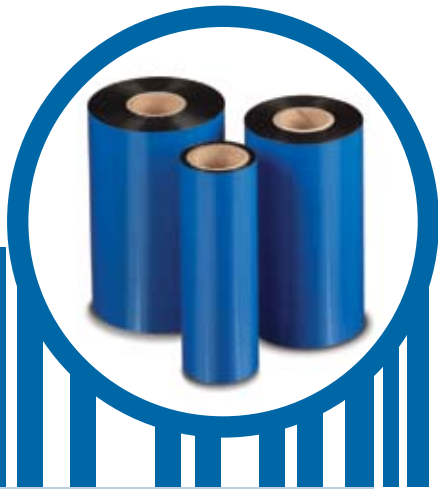

Wax

# Fast Wax

## General Purpose Wax

## Economy Wax

### Benefits

- Prints at fast speeds
- Prints at energy levels well below most competitive wax ribbons
- Excellent print quality on uncoated stocks
- Backcoat protects printhead
- Reliable, solid-performing wax ribbon

### Recommended Stock

Uncoated paper tag and label stocks

Coated paper tag and label stocks

### Technical Specifications

Color Code Tab.....	Yellow
Print Speed.....	12 IPS
Film Thickness.....	4.5 Microns
Total Ribbon Thickness...	7.6 Microns
Transmission Density .....	1.85
	MacBeth Scale
Ink Melting Point.....	64°C/147°F

### Sample Fast Wax Ribbons

- Part # CES11003 -110mm x 50m - CSI
- Part # CES11004 -110mm x 50m - CSO



What you need to know to quote ribbon business.

### Thermal Transfer Ribbon STORAGE CONDITIONS

For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing IIMAK thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.

First in service. Impressions that last.<sup>SM</sup>



310 Commerce Drive  
 Amherst, NY 14228  
 Call toll-free: **888.464.4625**  
 Fax toll-free: **888.329.0260**

Order On-line: [www.iimak.com](http://www.iimak.com)  
 Phone: **716.691.6333**  
 Fax: **716.691.3395**  
 Email: [salesinfo@iimak.com](mailto:salesinfo@iimak.com)