




First in service. Impressions that last.SM

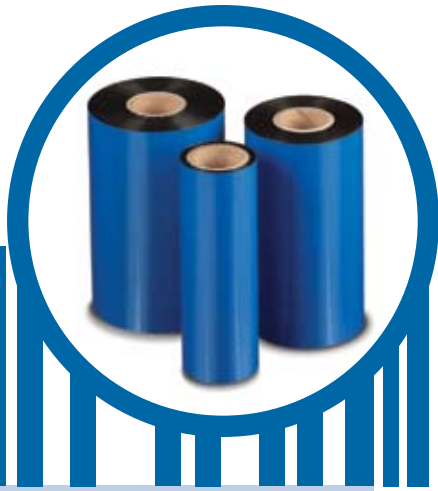

Wax/Resin

R2 Prime

Premium Wax/Resin

Excellent Durability

Benefits

- Stands up to IPA, household cleaners and other mild chemicals
- Excellent scratch and smudge resistance
- Moderate level of steam resistance
- Well-suited for a variety of demanding labeling applications
- Backcoat protects printhead

Recommended Stock

Coated Paper Tag & Label Stocks
Polyethylene Films

Polypropylene Films
Polyester Films

Technical Specifications

Color Code Tab..... Silver
 Maximum Print Speed 8 IPS
 Film Thickness..... 4.5 Microns
 Total Ribbon Thickness... 7.5 Microns
 Transmission Density 1.30
 MacBeth Scale
 Ink Melting Point..... 81°C/178°F

Sample R2 Prime Ribbons

Part # CES11009 – 110mm x 50m – CSI
 Part # CES11010 – 110mm x 50m – CSO

UL Labeling Reference:

Avery Fasson: UL MH 7834
 Flexcon: UL MH 16635



What you need to know to quote ribbon business.

Thermal Transfer Ribbon STORAGE CONDITIONS

For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing IIMAK thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.

First in service. Impressions that last.SM



310 Commerce Drive
 Amherst, NY 14228
 Call toll-free: **888.464.4625**
 Fax toll-free: **888.329.0260**

Order On-line: www.iimak.com
 Phone: **716.691.6333**
 Fax: **716.691.3395**
 Email: salesinfo@iimak.com